Towing tractor 2.0 ton






Towing truck

Truck specifications TWE200					
Identification	1.2	Model			TWE200
	1.3	Drive			Electric
	1.4	Operator type			Hand
	1.5	Load capacity/rated load	Q	kg	2000
Weight	2.1	Service weight with battery		kg	190 ¹⁾
Wheels	3.1	Drive wheel			Rubber, foam filled
	3.2	Wheel size, front		mm	Ø 260x85
	3.3	Wheel size, rear		mm	Ø 200x35
	3.5	Wheels, number front/rear (x = driven wheels)			2x/1
Dimensions	4.2	Height	h ₁	mm	517
	4.9	Height of tiller in drive position, min./max	h ₁₄	mm	955/1120
	4.12	Coupling height towing pin towing ball	h ₁₀ h ₁₀	mm mm	230/300 465
	4.19	Overall length	I ₁	mm	900
	4.21	Overall width	b ₁	mm	493
Perf. data	5.1	Travel speed, with/without load		km/h	5/5
	5.7	Gradeability, with/without load 2)		%	
Motor	6.1	Drive motor rating		kW	0,4
	6.4	Battery voltage, nominal capacity ${\rm K}_{\rm s}$		V/Ah	24/36 ³⁾
Other	8.1	Type of drive control			Curtis
	8.4	Sound level at the driver's ear according to EN 12053		dB(A)	70

¹⁾ Service weight incl. battery same for all type of battery options.
²⁾ See diagram for values.
³⁾ Different battery options available.


All data are based on table configuration. Other configurations may give other values. Truck performance and dimensions are nominal and subject to tolerances. Products and specifications are subject to change without notice.

Dimensional drawings

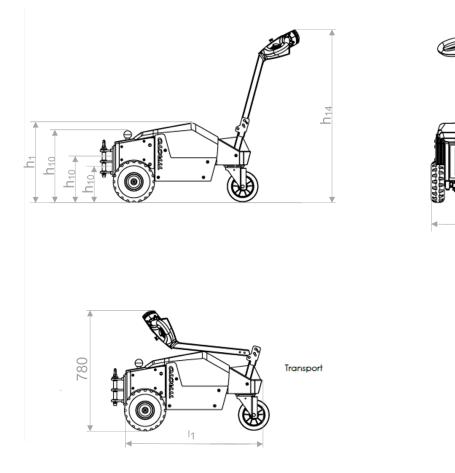

b

Gradeability

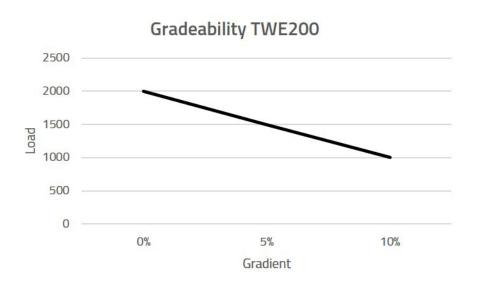

Truck features:

- Compact and easy to manoeuvre
- Ergonomic handle
- Rubber, foam filled wheels
- Foldable steering arm
- Combination towing device/tow ball
- Pincode keypad (option)
- Li-ion batteries availibility (option)
- Speed button as standard

