

Order picking truck 2.5 ton

OPTIO

L-series

OSE250

OSE250P



Order picking truck


Truck specifications						OSE250	OSE250P
Identification	1.1	Manufacturer				Toyota	Toyota
	1.2	Model				OSE250	OSE250P
	1.3	Drive				Electric	Electric
	1.4	Operator type				Stand on	Stand on
	1.5	Load capacity/rated load	Q	kg		2500	2500
	1.6	Load centre	c	mm		600	600
	1.8	Load distance, centre of support arm wheel to face of fork, (raised/lowered forks)	x	mm		885*/957*	885*/957*
	1.9	Wheelbase (raised/lowered forks)	y	mm		2020*/2092*	2020*/2092*
Weight	2.1	Service weight including battery		kg		810*	940*
	2.2	Axle load, with load, front/rear		kg		970*/2340*	1060*/2380*
	2.3	Axle load, without load, front/rear		kg		570*/240*	650*/290*
Wheels	3.1	Drive/castor/fork wheels				Polyurethane	Polyurethane
	3.2	Wheel size, front (drive)		mm		Ø 230x82	Ø 230x82
	3.3	Wheel size, rear		mm		Ø 85x74	Ø 85x74
	3.4	Additional wheels, size (castor)		mm		Ø 150x78	Ø 150x78
	3.5	Wheels, number front / rear (x = driven wheels)				1x + 1/4	1x + 1/4
	3.6	Track width, front	b ₁₀	mm		495	495
	3.7	Track width, rear	b ₁₁	mm		370*	370*
Dimensions	4.4	Lift	h ₃	mm		140	140
		Lift height	h ₂₃	mm		225	225
	4.8	Stand height	h ₇	mm		130	130/1195
	4.9	Height of tiller in drive position	h ₁₄	mm		TBD	TBD
	4.15	Height, fork lowered	h ₁₃	mm		85	85
	4.19	Overall length	l ₁	mm		2502*	2502*
	4.20	Length to face of forks	l ₂	mm		1354*	1354*
	4.21	Overall width	b ₁	mm		790	790
	4.22	Fork dimensions	s/e/l	mm		57/180/1150*	57/180/1150*
	4.25	Width over forks	b ₅	mm		550*	550*
	4.32	Ground clearance, center of wheelbase	m ₂	mm		28	28
	4.34.1	Aisle width for pallets 1000 x 1200	A _{st}	mm		3118*	3118*
	4.34.2	Aisle width for pallets 800 x 1200	A _{st}	mm		3036*	3036*
	4.35	Turning radius	W _a	mm		2327*	2327*
		Clear width driver compartment entrance	l ₂₄	mm		458	420
Performance data	5.1	Travel speed, with/without load, forward		km/h		8/12	8/12
		Travel speed, with/without load, backwards		km/h		7,5/10,5	7,5/10,5
	5.2	Lift speed, with/without load		m/s		0,03/ 0,05	0,05/ 0,07
	5.3	Lowering speed, with/without load		m/s		0,07/ 0,03	0,15/ 0,04
	5.8	Max. gradeability, with/without load		%		8/13	8/13
	5.9	Acceleration time (over 10 m) (without/ with load)		s		4,2 /6,2	4,2 /6,2
	5.10	Service brake				Electromagnetic	Electromagnetic
Electric motor	6.1	Drive motor rating S2 60 min		kW		2,8	2,8
	6.2	Lift motor rating (S3 7%)		kW		1,0	2,0
	6.4	Battery voltage, nominal capacity K ₅		V/Ah		24/300*	24/300*
	6.5	Battery weight (min./max.)		kg		190*/285*	190*/285*
	6.6	Energy consumption acc to EN 16796		kWh/h		0,39	TBD
	6.7	Turnover output		t/h		182	TBD
	6.8	Energy consumption at turnover output		kWh/h		1,29	TBD
Other	8.1	Type of drive control				Variable AC	Variable AC
	10.7	Sound level at the driver's ear according to EN 12053		dB(A)		62	61

*) Further alternatives are available and will produce other values. Data is based on a configuration with Fork length 1150mm (U=330mm), Fork width 550mm, Small battery compartment, Lead acid battery.

All data are based on table configuration. Other configurations may give other values.

Truck performance and dimensions are nominal and subject to tolerances.

Toyota Material Handling Manufacturing Sweden AB products and specifications are subject to change without notice.

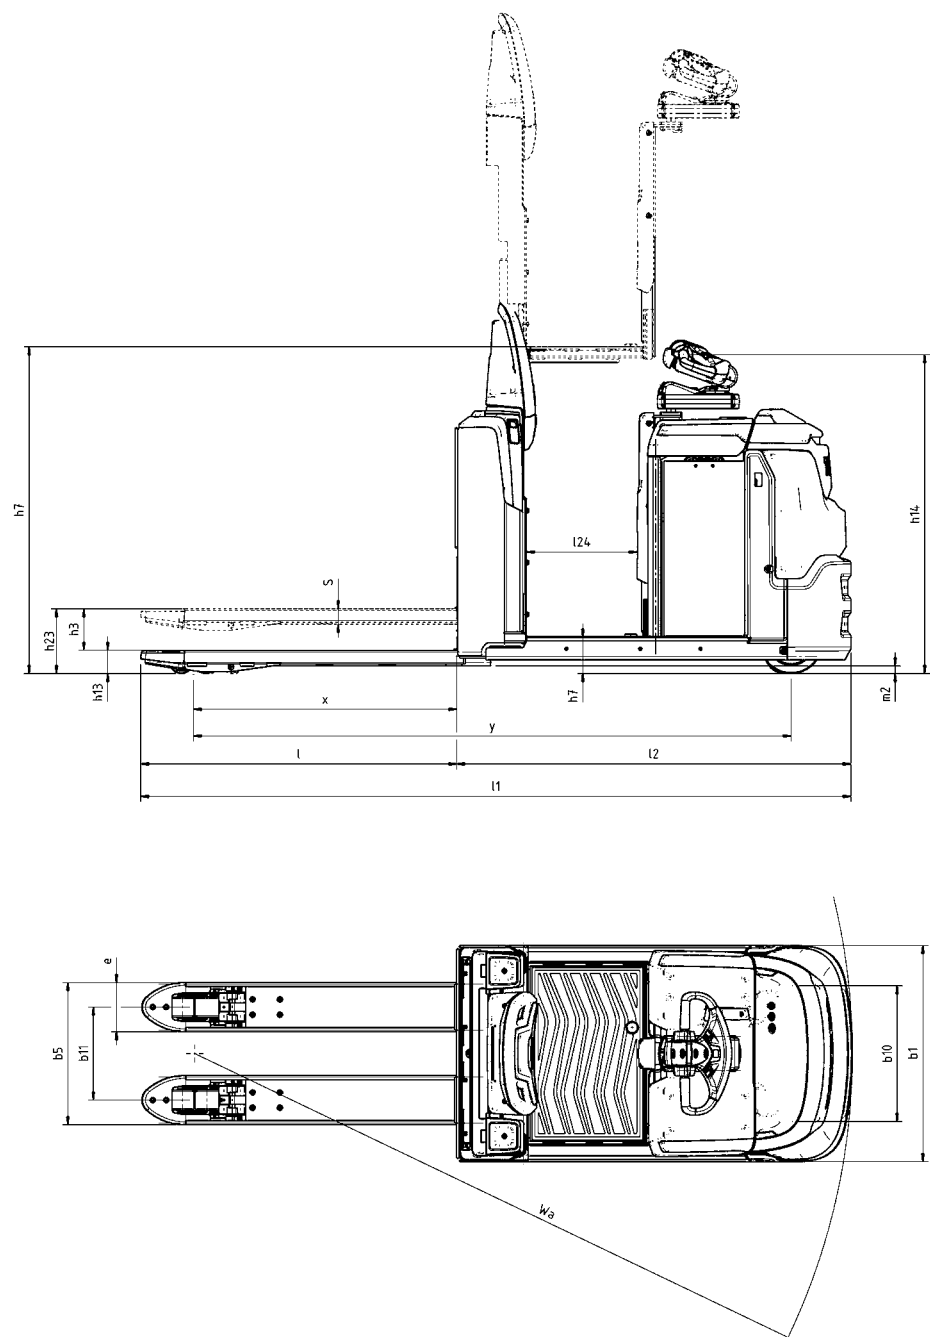

Truck features:

- High performance models
- E-man steering concept
- Low step-in
- Wide operator space
- Multiple storage compartments
- Platform lift model
- Integrated warning lights (option)
- Integrated daytime running lights (option)
- Walkie buttons (option)
- T-mote (option)
- Vibration damped floor (option)
- E-bar option for easy access to picking devices
- Easy battery access
- Wide battery range with Lead-Acid and Li-Ion



TMHE-Toyota Material Handling Europe, version 1, 2025-06-27