
MAIN SPECIFICATIONS


Model			4FD150	4FD180	4FD200	4FD230	4FD240
Engine Model			HINO J08E-UM	HINO J08E-UM	HINO J08E-UM	HINO J08E-UM	HINO J08E-TM
Load Capacity		kg	15,000	18,000	20,000	23,000	24,000
Load Center		mm	900	900	900	900	1,250
Overall Width	A	mm	2,935	2,960	3,040	3,045	3,045
Turning Radius (Outside)	В	mm	4,950	4,950	5,000	5,200	5,900
Overhead Guard Height (Cabin Height)	С	mm	3,400	3,430	3,465	3,465	3,560
Length to Fork Face	D	mm	5,265	5,290	5,370	5,545	6,315

ENGINE SPECIFICATIONS

Engine Model		HINO J08E-UM	HINO J08E-TM	
Model		4FD150-4FD230	4FD240	
Piston Displacement	СС	7,684	7,684	
Rated Horsepower/r.p.m	kW JIS ps	128 / 2,300 174 / 2,300	159 / 2,300 216 / 2,300	
Rated Torque/r.p.m	Nm JIS kgfm	640 / 1,600 65 / 1,600	750 / 1,600 76.5 / 1,600	

J08E-UM,TM:Non-road Mobile Machinery (97/68/EC;Stage IIA) EPA Non-road Diesel Engine (40 CFR Part89;Tier 3)

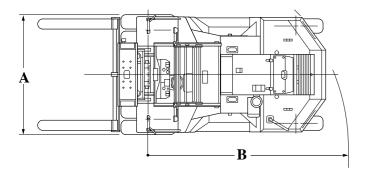

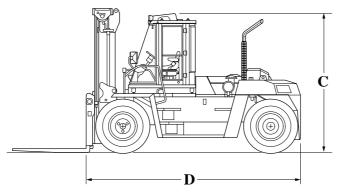

The data in this brochure is determined based on our standard testing condition.

The performance may vary depending on the actual specification and condition of the vehicle as well as the condition of the operating area. Availability and specifications depend on market and are subject to change without notice.

Due to photography and printing, color of actual vehicle may vary from this brochure. Some photos have been computer-enhanced. Please consult your Toyota representative for details.





All rights reserved by Toyota Industries Corporation.



TOYOTA MATERIAL HANDLING INTERNATIONAL

150 to 24.0 ton **SERIES**





Ecology and Economy, with Ease & Comfort.



of vision and large capacity air conditioner ensure that work is performed in a comfortable environment. Furthermore, superb features such as the power assisted control lever, smooth two-stator torque converter, and electrical switch parking brake, full hydraulic power steering with steering synchronizer help to eliminate stress and reduce operator fatigue.

A low-vibration, low-noise, fully floating pillar-less cabin with excellent field







Multi-function Suspension Seat

The seat with reclining function, seatbelt, and body weight adjustment is equipped as standard to provide operator comfort while working. A swivel seat is available as an option.





Full Hydraulic Power Steering with Steering Synchronizer

Knob displacement has been eliminated by using the knob positioning control to automatically align the rear wheel cornering angle









Key-off Lift Lock

The lift is automatically locked when the engine key is turned off.



NOx Emissions

to better fuel consumption.

38% Reduction*

Low Emission AdVanced Engine Series

Rated Horsepower/r.p.m Rated Torque/r.p.n

 $_{4\text{FD240}}\,159_{\text{kW}}^{\text{kW}}\,750_{\text{11,600}}^{\text{Nm}}$

128kW 640Nm /1,600

Toyota engine technology provides high power while also ensuring optimal fuel efficiency and low harmful gas emissions. The newly adopted cooling exhaust gas recirculation (EGR) system and intercooler dramatically lower NOx and CO2 emissions and contribute

TOYOTA

CO₂ Emissions

10% Reduction*

*Compared to HINO J08E-T Engine



capacity forklift is equipped with a wide range of features designed for efficient maintenance. Hydraulic cylinders allow the cabin to be tilted open 45° for doing maintenance



Wet Disc Brake with Dedicated **Cooling Circuit**

A dedicated oil cooler is used to perform forced cooling to prevent overheating. This highly reliable brake not only provides the operator with peace of mind, but also contributes to greatly reduced brake maintenance costs



